


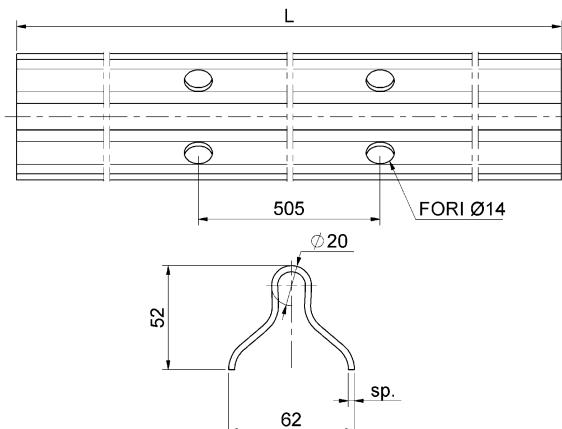

Art. 904 – OPEN RAIL ZINCK PLATED – ROND, to be cemented


DIMENSIONS

Ø	Ø	L	sp.
20 - 3 m, sp3	Ø20	3000	3
20 - 3 m, sp4	Ø20	3000	4
20 - 6 m, sp3	Ø20	6000	3
20 - 6 m, sp4	Ø20	6000	4

MODALITA' D'APPLICAZIONE

- Component to be cemented.
- Build foundations in reinforced concrete, verify that it is suitable to the forces transmitted by the leaf of the gate.
- Setting of the rail to the laying:
 - * Welding iron rod of suitable dimensions
 - * otherwise, inserting iron rod of suitable dimensions in the arranged holes.
- Laying:
 - * Setting the rail into the foundation, getting it level, and binding it to reinforcement
 - * Concrete casting
- Before setting the gate , wait for the total curing of the concrete

MATERIALS USED FOR CONSTRUCTION

- RAIL: rolled tape DX51D+Z200 UNI EN 10346

SUPPLY

- The rail is supplied ZINCK PLATE
- The surfaces of zinc plated parts is free from hexavalent chrome, with corrosion resistance "degree 3" acc. to UNI EN 1670.

MAINTENANCE

- Without maintenance.

PERIODICAL CONTROLS:

- At constant intervals (max. every 12 months) examine the rail to check the possible presence of cracks, deformations, lacerations, breaks, wears upper than 10% of the initial dimension, etc. of all components
- In case of anomalies, avoid the usage of the rail and let professional personnel check the installed product.

IMPORTANTE:

Le forze dichiarate sono da ritenersi valide solo se l'articolo è completo di tutti i componenti originali "COMBI ARIALDO" e non presenta modifiche.

La società "COMBI ARIALDO" si riserva di apportare in qualsiasi momento e senza preavviso modifiche tecniche ed estetiche.

L'aggiornamento del documento all'ultima revisione va verificato rivolgendosi alla società "COMBI ARIALDO".

Ogni disegno, fotografia, marchi, loghi ecc. devono intendersi come proprietà esclusiva della società "COMBI ARIALDO".